



Model: BLACK PANTHER

line Capacit(mm/m): 0.28/210 0.33/160 0.37/130

Line Capacit(Lbs/yds): 10/210 13/160 16/130

Brake System : Magnetic

Gear Ratio: 6:3.1 Ball Bearing: 8+1 Drag Max: 10kg

Weight: 256g

Line pre handie tum: 38cm





















GEAR RATIO 6.5:1 Audible click star drag 9+1 Ball Bearing system. Lightweight graphite frame. Handie aluminium with PVC knob. **BREAK HT300 Carbon Drag system** Copper pinion gear thickest and strong











Model

Gear ratio

Line [mm/m]

3000

5.2:1 5.2:1

0.20/240 0.25/200 0.30/140

SHIP















GEAR RATIO: 6.3:1 LINE CAPACITY

| 0.26 | mm | - | 140 | m |
|------|----|---|-----|---|
| 0.28 | mm | - | 125 | m |
| 0.30 | mm | - | 110 | m |

















Ratio: 5.2:1
















097-296-7941



















THE PONEER SURF REEL








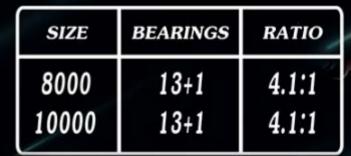



f lungohonline



097-296-7941







| GEAR | BALL | LINE CAPACITY |
|-------|----------------------------------|---|
| RATIO | BEARINGS | mm/M |
| 5.2:1 | 4+1 | 0.15mm/200M 0.18mm/180M 0.20mm/150M |
| 5.2:1 | 4+1 | 0.18mm/240M 0.20mm/200M 0.25mm/140M |
| 5.2:1 | 4+1 | 0.20mm/240M 0.25mm/200M 0.30mm/140M |
| 5.2:1 | 4+1 | 0.30mm/200M 0.35mm/160M 0.40mm/120M |
| 5.2:1 | 4+1 | 0.35mm/200M 0.40mm/160M 0.50mm/120M |
| | 5.2:1 5.2:1 5.2:1 5.2:1 | 5.2:1 4+1 5.2:1 4+1 5.2:1 4+1 5.2:1 4+1 5.2:1 4+1 |





















| Model | BALL BEARINGS | GEAR RATIO | LINE CAPACITY (mm/m) | LINE CAPACITY (Ib/yds) |
|------------------|------------------|------------|---|----------------------------|
| SEAGATE SG500 | 2+1 | 6.3:1 | 0.40mm/390M 0.45mm/300M 0.50mm/230M | 15/430 20/330 25/250 |

- 2+1 Ball Bearing system.
- Lightweight graphite frame.
- Copper pinion gear thickest and strong
- Audible click star drag
- BREAK HT300 Carbon Drag system
- Handle aluminium with PVC Krob.











Pabbit R-5 200A


































1003 B 2000 2500 B






















| Model Ball Bearings | | Gear Ratio | Max Drag | |
|------------------------|---|------------|----------|--|
| REVROS 2000 H | 7 | 5.6:1 | 2 kg | |
| REVROS 2500 H | 7 | 5.6:1 | 4 kg | |
| REVROS 7 3000 H | | 5.6:1 | 6 kg | |



























| Model | Ball Bearings | Gear Ratio | Max Drag | |
|------------------|------------------|------------|----------|--|
| REVROS 2000 R | 4 | 4.8:1 | 2 kg | |



























FX 1000FB,FX2500FB **FX4000FB**

- * 1 STAINLESS STEEL BALL BEARINGS + 1 ROLLER BEARING
- * 5.2:1 GEAR RATIO
- * DYNA BALANCE ANTI-WOBBLE SYSTEM
- * SUPER STOPPER II ANTI-REVERSE
- * OVERSIZED POWER ROLLER REDUCES LINE TWIST
- * DIECAST ALUMINUM SPOOL
- * PROPULSION-LINE MANAGEMENT SYSTEM









FX 1000FB,FX2500FB **FX4000FB**

- * 1 STAINLESS STEEL BALL BEARING
- * 4.6:1 GEAR RATIO
- * DYNA BALANCE ANTI-WOBBLE SYSTEM
- * OVERSIZED POWER ROLLER BALL BEARING LINE ROLLER
- * DIECAST ALUMINUM SPOOL
- * PROPULSION-LINE MANAGEMENT SYSTEM













RABBIT R-1

- * Anti-twist line roller
- * Computer designed balanced rotor to minimize vibration
- * Right/Left interchangeable handle
- * Click sounded drag knob
- Excellent line lay oscillation system
- Power drive gear equipped for higher strength and better smoothness













R-CARP 100

- * Aluminum spool
- * Computer designed balanced rotor
- * Right/Left interchangeable handle
- * Click sounded drag knob
- * Excellent line lay oscillation system




















สีทอง





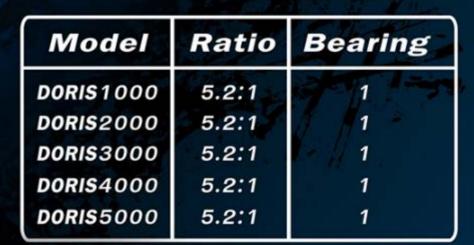



You Tube LTGSHOW

f lungohonline

@lungohonline

097-296-7941









| Model | BALL BEARINGS | GEAR RATIO | LINE CAPACITY (mm/m) | LINE CAPACICTY (Ib/yds-mono) | MAX DRAG |
|-------|------------------|------------|---|---|----------|
| T-REX | 10 | 6.3:1 | 0.32mm/100M 0.37mm/ 80M 0.40mm/ 75M | 101b/180yds 121b/160yds 181b/140yds | 4.5kg |

The ball bearings



















GEAR RATIO: 6.3:1

LINE CAPACITY

0.26 mm (2.5#) - 210 m

0.28 mm (3.0#) - 180 m

0.30 mm (3.5#) - 140 m











